

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Video Projector
Manufacturer: Christie
Firmware Version: N/A
Model(s): DHD550-G, DWU550-G

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	5/16/2013	1.6.0	3.5.0	Initial version.

Driver Notes:

IP Link® Device Interface Communication Sheet

Control Commands & States:

Aspect Ratio	Auto	Native	4:3
	Letterbox	Full Screen	Full1
	Full2		
Auto Image	Execute		
Closed Caption	CC1	CC2	Off
Input	VGA	HDMI	DVI
	Display Port	Component	S-Video
	Composite	USB	
Lamp Mode	Normal	Eco	Auto
On Screen Display	On	Off	
PIP Mode	On	Off	
PIP Position	Left	Up	Right
	Down	Bottom Right	Bottom Left
	Top Left	Top Right	
PIP Size	Small	Medium	Large
PIP Swap	Execute		
Power Control	On	Off	
Video Mute	On	Off	

IP Link® Device Interface Communication Sheet

Status Available:

Aspect Ratio	Auto	Native	4:3
	Letterbox	Full Screen	Full1
	Full2		
Closed Caption	CC1	CC2	Off
Connection Status	Connected	Disconnected	
Input	VGA	HDMI	DVI
	Display Port	Component	S-Video
	Composite	USB	
Lamp Usage	Hours		
Lamp Mode	Normal	Eco	Auto
On Screen Display	On	Off	
PIP Mode	On	Off	
PIP Position	Left	Up	Right
	Down	Bottom Right	Bottom Left
	Top Left	Top Right	
PIP Size	Small	Medium	Large
Power Control	On	Off	
Power Status	On	Off	Cooling Down
	Warming Up	Status Unavailable	
Video Mute	On	Off	

IP Link® Device Interface Communication Sheet

MLC60 Series Supported Commands:

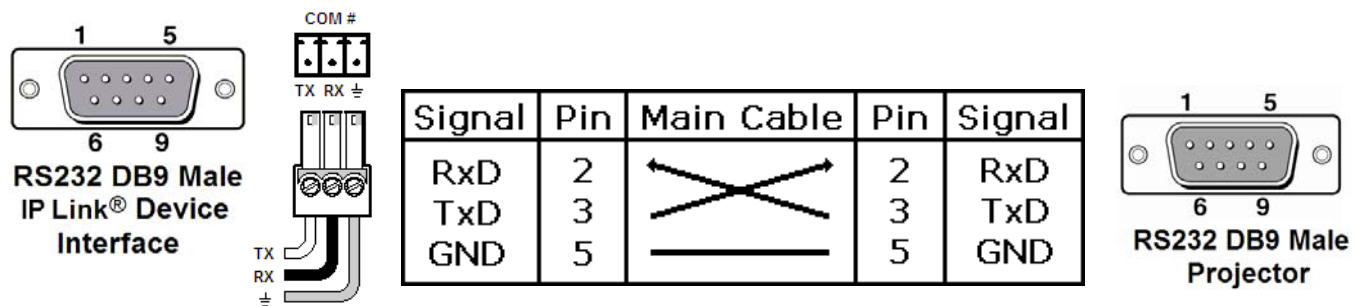
Aspect Ratio	Auto	Native	4:3
	Letterbox	Full Screen	Full1
	Full2		
Auto Image	Execute		
Closed Caption	CC1	CC2	Off
Input	VGA	HDMI	DVI
	Display Port	Component	S-Video
	Composite	USB	
Lamp Mode	Normal	Eco	Auto
On Screen Display	On	Off	
PIP Mode	On	Off	
PIP Position	Left	Up	Right
	Down	Bottom Right	Bottom Left
	Top Left	Top Right	
PIP Size	Small	Medium	Large
PIP Swap	Execute		
Power Control	On	Off	
Video Mute	On	Off	

Cable and Adapter Requirements:

F/F RS-232C Null Modem Serial Cable

Notes for the Device:

"Serial port echo" needs to be OFF.

Serial communication:**Port Type:** RS-232**Baud Rate:** 115200**Data Bits:** 8**Parity:** None**Stop Bits:** 1**Flow Control:** None**Pin Assignments Diagram:****General Notes:**